



## WWW.DELOCK.COM

## DATA SHEET




# PCI Express x8 Card > 2 x internal SAS / SATA 6 Gb/s

## **Description**

The Delock PCI Express card expands your PC by two internal SAS / SATA ports. The bootable eight channel SAS and SATA controller supports JBOD for any RAID or NON-RAID solutions. The data mediums can be arranged in any matrix or as redundant array in the OS. Applications are copy stations, NAS, back-up and storage systems.





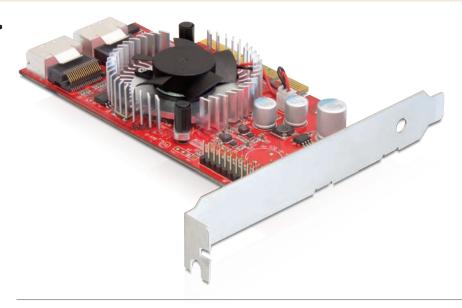

Ref. 89307

EAN 4043619893072

Country of origin Taiwan Customs tariff number 84733020

## Specification

• Chipset: Marvell 9485

Connection:

8 x internal SAS / SATA 6 Gb/s ports over 2 x SFF 8087

PCI Express x8, Rev. 2.0

 Data transfer rate: SAS up to 6 Gb/s

SATA up to 6 Gb/s

PCI Express x8 up to 40 Gb/s

- Active heat sink with 12 V fan
- Supports hard disk drives with Native Command Queue (NCQ)
- Supports ATA, ATAPI
- Supports Power Management D0, D1, D3
- Supports SAS Multiplexing
- Supports SSC (Spread Spectrum Clocking)
- Supports Wide-SAS, SAS Protocoll (SSP), SAS Management Protocol (SMP), SATA Tunneling Protocol (STP)
- Hot-Plug

### **System requirements**

- Windows XP/XP-64/Vista/Vista-64/7/7-64
- PC with a free PCI Express x8 / x16 / x32 port

### Package content

- PCI Express card, low profile bracket
- Driver CD, user manual

#### **Package**

Box

<sup>© 2011</sup> by Delock. All names and symbols mentioned here are property of the respective producer. Printing errors, changes and errors excepted.